

Supa Argon 23

Description

Supa Argon 23 with a high CO₂ concentration displays excellent dip transfer performance on steel over 10mm in vertical and overhead positions.

It is the ideal choice for fast out-of-position welding of heavy sections and offers excellent root penetration and side fusion. Supa Argon 23 is particularly suited to the welding of heavy tubular sections.

Very heavy sections, deep penetration, low to medium spatter. The CO₂ content in these gases is ideal for welding galvanised metals.

Applications

- MIG Welding of Mild and Carbon Manganese Steels
- Welding Thickness Range 6 - 50mm

Hazard statement(s)

- Contains gas under pressure; may explode if heated.

Prevention statement(s)

- None allocated.

Response statement(s)

- None allocated.

Storage statement(s)

- Protect from sunlight. Store in a well-ventilated place.

Other hazards

- Asphyxiant. Effects are proportional to oxygen displacement.

Signal Word: Warning

UN No.: 1956

Hazard No.: 2TE

Chem Symbol: N/A

Classification: AS 4882-2003:
SG-AC-23

Pictograms:



Wherever, whenever...

you can't bottle attitude

☎ 13 78 72 www.supagas.com.au


Supa Argon 23

General Specifications

Specifications	E Cyl.	G Cyl.	6 Pack	12 Pack
Cylinder/Pack (101.325kPa @15°C) - L	4.3	10.0	91.5	183.0
Water capacity per cylinder - L	23	50	300	600
Cylinder Colour	Peacock Blue/Green Grey Shoulder			
Outlet Connection	Type 10			
Package Dimensions (H x W x D) - mm	780 x 230	1,510 x 230	1,900 x 780 x 510	1,900 x 780 x 1,020

Cylinder dimensions are approximate – variations may occur due to manufacturing tolerances. Height includes the valve. Container sizes may vary from state to state.

Package Sizes Available

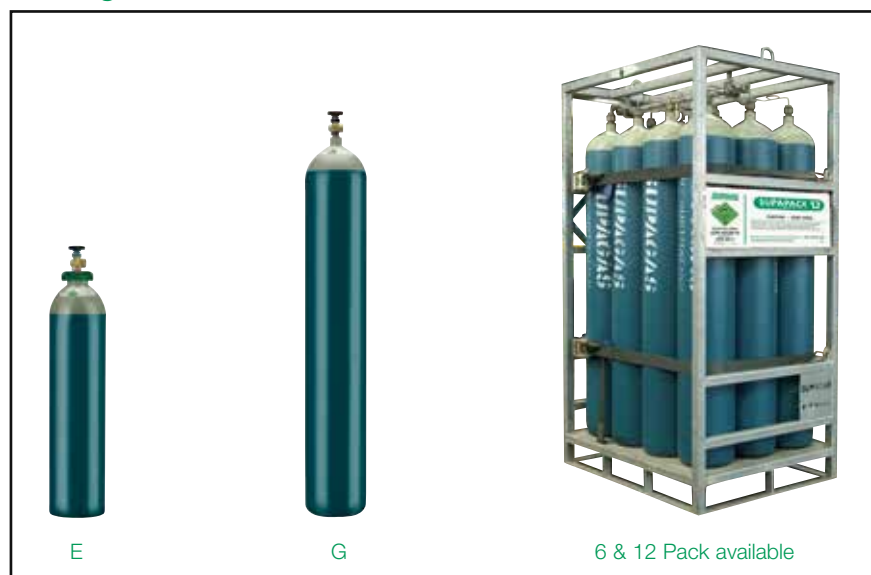

Quality Assurance

Supagas Pty Ltd is committed to comply with the requirements of ISO 9001-2015 and to continually improve the effectiveness of our Quality Management System.

We review the Quality Management System and the quality policy on a regular basis to ensure effectiveness and suitability to the organisation.

Everyone at Supagas understands we must provide a safe environment for both our employees and the wider community. We are therefore committed to implement and maintain a continual improvement approach throughout the organisation whilst also meeting all applicable statutory and regulatory requirements.

For Further Information

On how we can help you with all your gas and welding needs, drop in to your local Supagas branch or call Customer Service on 13 78 72.

Typical Analysis

Product Type	Ar	CO ₂	Tolerance on minor component mix.
Industrial Grade	82%	18%	+/- 10%

Wherever, whenever...